

## PRODUCT SPECIFICATION:

Product series: RW12

680x122x80mm

1295x122x80mm

1595x122x80mm



## PRODUCT DESCRIPTION

- Body: S/S304 Stainless Steel (316 for option)
- PC material, could meet IK09 and 750 GWT requirement
- Other characteristics: pollution free, low power consumption, high luminous efficiency & IP65
- High-low impact, high humidity environmental tests

## FEATURES

- As a special tri-proof engineering lighting luminaire, **RW12** is resistant to acid, alkali and corrosion to be used in chemical places due to the material it is used by cold rolling the 304 stainless steel for the housing.
- The luminaire is sealed by stainless steel clips, and together with sealed strip and stainless steel waterproof cable gland, the IP could meet 66.
- The luminaire can be used in many extreme environments, due to the using of top brand driver (ambient temperature: -20°C~40°C)
- Top brand components and proper structural design enable the luminaire to obtain light efficiency of 160lm/W and 5-year warranty.



## RW12 IP66 Stainless Steel Housing Waterproof Fixture



## 【Specification】

Model	RW12-15W-600	RW12-30W-1200	RW12-45W-1200	RW12-32W-1500	RW12-65W-1500
System Power	15W	30W	45W	32W	65W
Light Efficiency	160lm/W	160lm/W	160lm/W	160lm/W	160lm/W
Lumen output (Max)	2400lm	4800lm	7200lm	5200lm	10400lm
Voltage	AC 220-240V				
Frequency	50/60Hz				
Diffuser material	Polycarbonate				
Body material	S/S304 Stainless Steel (316 for option)				
Body color	Silvery / White / Grey				
LED type	SMD 2835				
Driver brand	Philips Driver				
CCT	3000K / 4000K / 6500K				
CRI	> 80				
SDCM	<4				
PF	>0.9				
Beam angel	120°				
IP	IP65				
IK	IK08				
Mounting	Suspension Chain				
Ta	-20° C to 50° C				
Certificate	ENEC / CE / CB / ROHS				
Product Size	680x122x80mm	1295x122x80mm	1295x122x80mm	1595x122x80mm	1595x122x80mm
Innerbox Size	690x126x85mm	1300x126x85mm	1300x126x85mm	1600x126x85mm	1600x126x85mm
Carton Size	735x270x190mm	1345x270x190mm	1345x270x190mm	1645x270x190mm	1645x270x190mm
N.W. / CTN	7.5 kg	12.4 kg	12.4 kg	15.2 kg	15.2 kg
G.W. / CTN	8.6 kg	14.2 kg	14.2 kg	17.6 kg	17.6 kg
Qty / CTN	4pcs	4pcs	4pcs	4pcs	4pcs



**PRODUCT VERSION**

- 680mmx122mmx80mm



- 1295mmx122mmx80mm



- 1595mmx122mmx80mm



## PRODUCT VERSION

- 680mmx122mmx80mm




- 1295mmx122mmx80mm



- 1595mmx122mmx80mm



### DIMENSION:

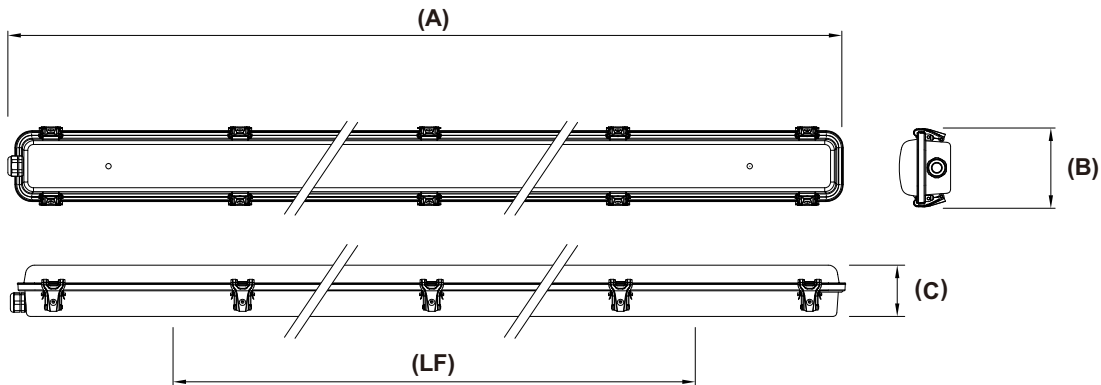

Product Size	A	B	C	LF
RW12 -600MM	680mm	122mm	80mm	430mm
RW12 -1200MM	1295mm	122mm	80mm	1000mm
RW12 -1500MM	1595mm	122mm	80mm	1300mm

### APPLICATION:

warehouse, gymnasiums, manufacturing, outdoor canopies and cold storage

