

IP66 LED Waterproof Luminaire

RW18 SERIES



CCT switchable
Power adjustable
Through wiring
Emergency
Sensor
Dali



Powered by
PHILIPS OSRAM TRIDONIC

Advantages

- ⊙ Reliable LED technology - maintenance
- ⊙ Diffuser with optical design ensures visual comfort
- ⊙ The light source module can be replaceable
- ⊙ 3000, 4000 and 5000K color temperature in the same body and adjusted by selector switch
- ⊙ Cable through for easy and quick installation
- ⊙ Ceiling-mounted brackets and suspension hooks included
- ⊙ 150lm/W or 180lm/W
- ⊙ Fast connector is optional for easy installation
- ⊙ 5 years warranty



Workshop



Factory




Subway

Specifications (150lm/W)

Model	RW18-18W-600	RW18-30W-1200	RW18-40W-1200	RW18-30W-1500	RW18-40W-1500	RW18-55W-1500	RW18-60W-1500
Power	18W	30W	40W	30W	40W	55W	60W
Input Voltage	AC220-240V						
Frequency	50/60Hz						
Efficiency	2700lm	4500lm	6000lm	4500lm	6000lm	8250lm	9000lm
Body & Lens	PC						
Body color	Grey (RAL7035)						
LED driver	PHILIPS / OSRAM / TRIDONIC / Boke / Lifud						
LED type	SMD 2835 0.5W						
Working temperature	-20°C to +40°C						
IP Rate	IP66						
IK Rate	IK08						
Beam Angel of light source	120°						
Protection class IEC	Saftey class I (I)						
SDCM	<4						
Light source replaceable	YES						
Init.Corr.Color Temperature	3000K 4000K 5000K 5700K 6500K						
Init.Color Rendering Index	80						
Driver failure rate at 5000 h	<1 %						
Power factor	>0.9						
Product Size (mm)	640x79x68	1205x79x68	1505x79x68				
Innerbox Size (mm)	680x85x72	1215x85x72	1515x85x72				
Carton Size (mm)	695x305x275	1230x270x235	1530x305x190				
Qty / CTN	12pcs	9pcs	8pcs				


Dimension

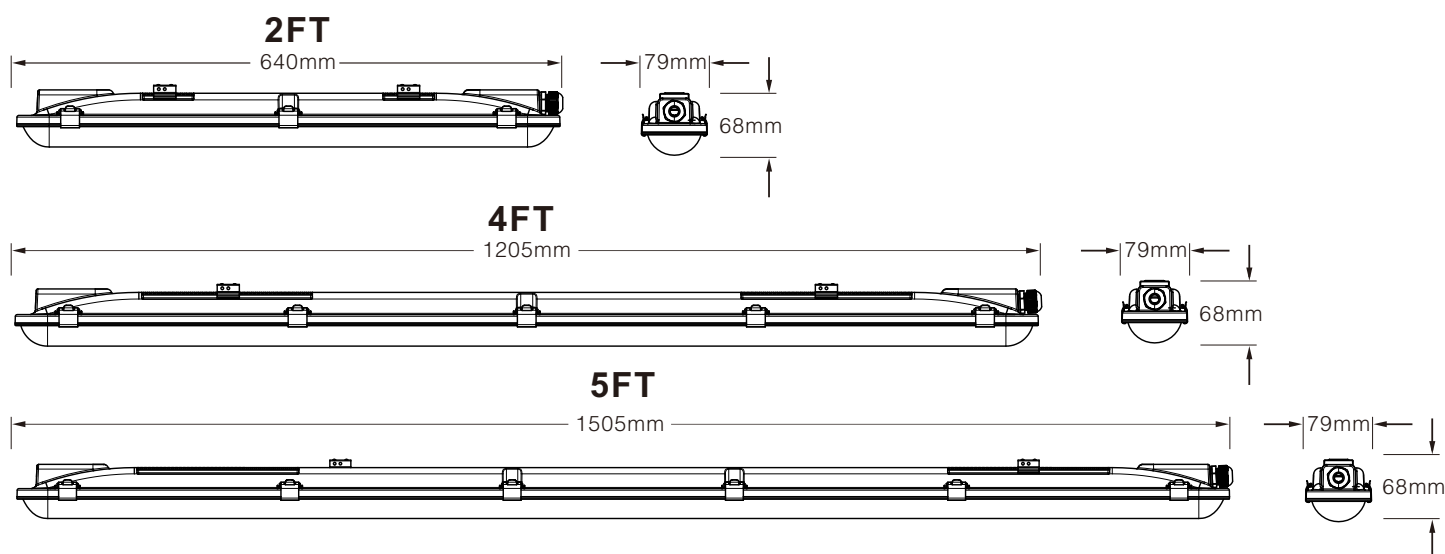


Specifications (180lm/W)

Model	RW18-25W-600	RW18-34W-1200	RW18-42W-1200	RW18-34W-1500	RW18-42W-1500	RW18-55W-1500	RW18-65W-1500
Power	25W	34W	42W	34W	42W	55W	65W
Input Voltage	AC220-240V						
Frequency	50/60Hz						
Efficiency	4500lm	6120lm	7560lm	6120lm	7560lm	9900lm	11700lm
Body & Lens	PC						
Body color	Grey (RAL7035)						
LED driver	PHILIPS / OSRAM / TRIDONIC / Boke / Lifud						
LED type	SMD 2835 0.5W						
Working temperature	-20°C to +40°C						
IP Rate	IP66						
IK Rate	IK08						
Beam Angel of light source	120°						
Protection class IEC	Saftey class I (I)						
SDCM	<4						
Light source replaceable	YES						
Init.Corr.Color Temperature	3000K 4000K 5000K 5700K 6500K						
Init.Color Rendering Index	80						
Driver failure rate at 5000 h	<1 %						
Power factor	>0.9						
Product Size (mm)	640x79x68	1205x79x68	1505x79x68				
Innerbox Size (mm)	680x85x72	1215x85x72	1515x85x72				
Carton Size (mm)	695x305x275	1230x270x235	1530x305x190				
Qty / CTN	12pcs	9pcs	8pcs				

Dimension

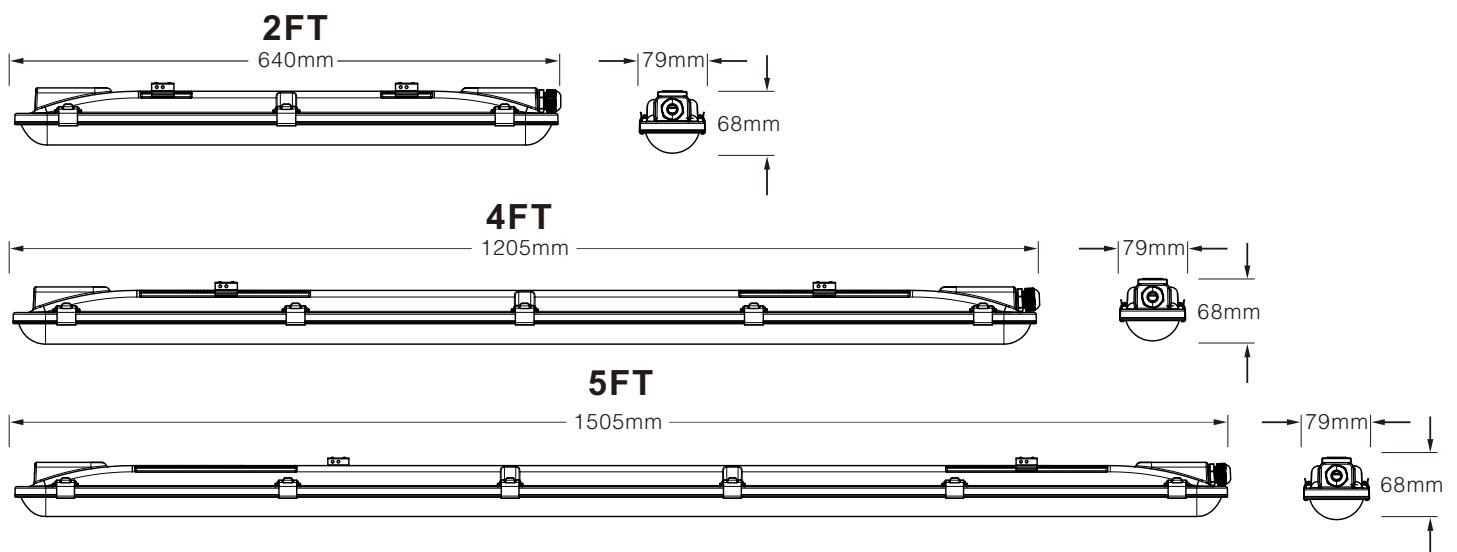

Features

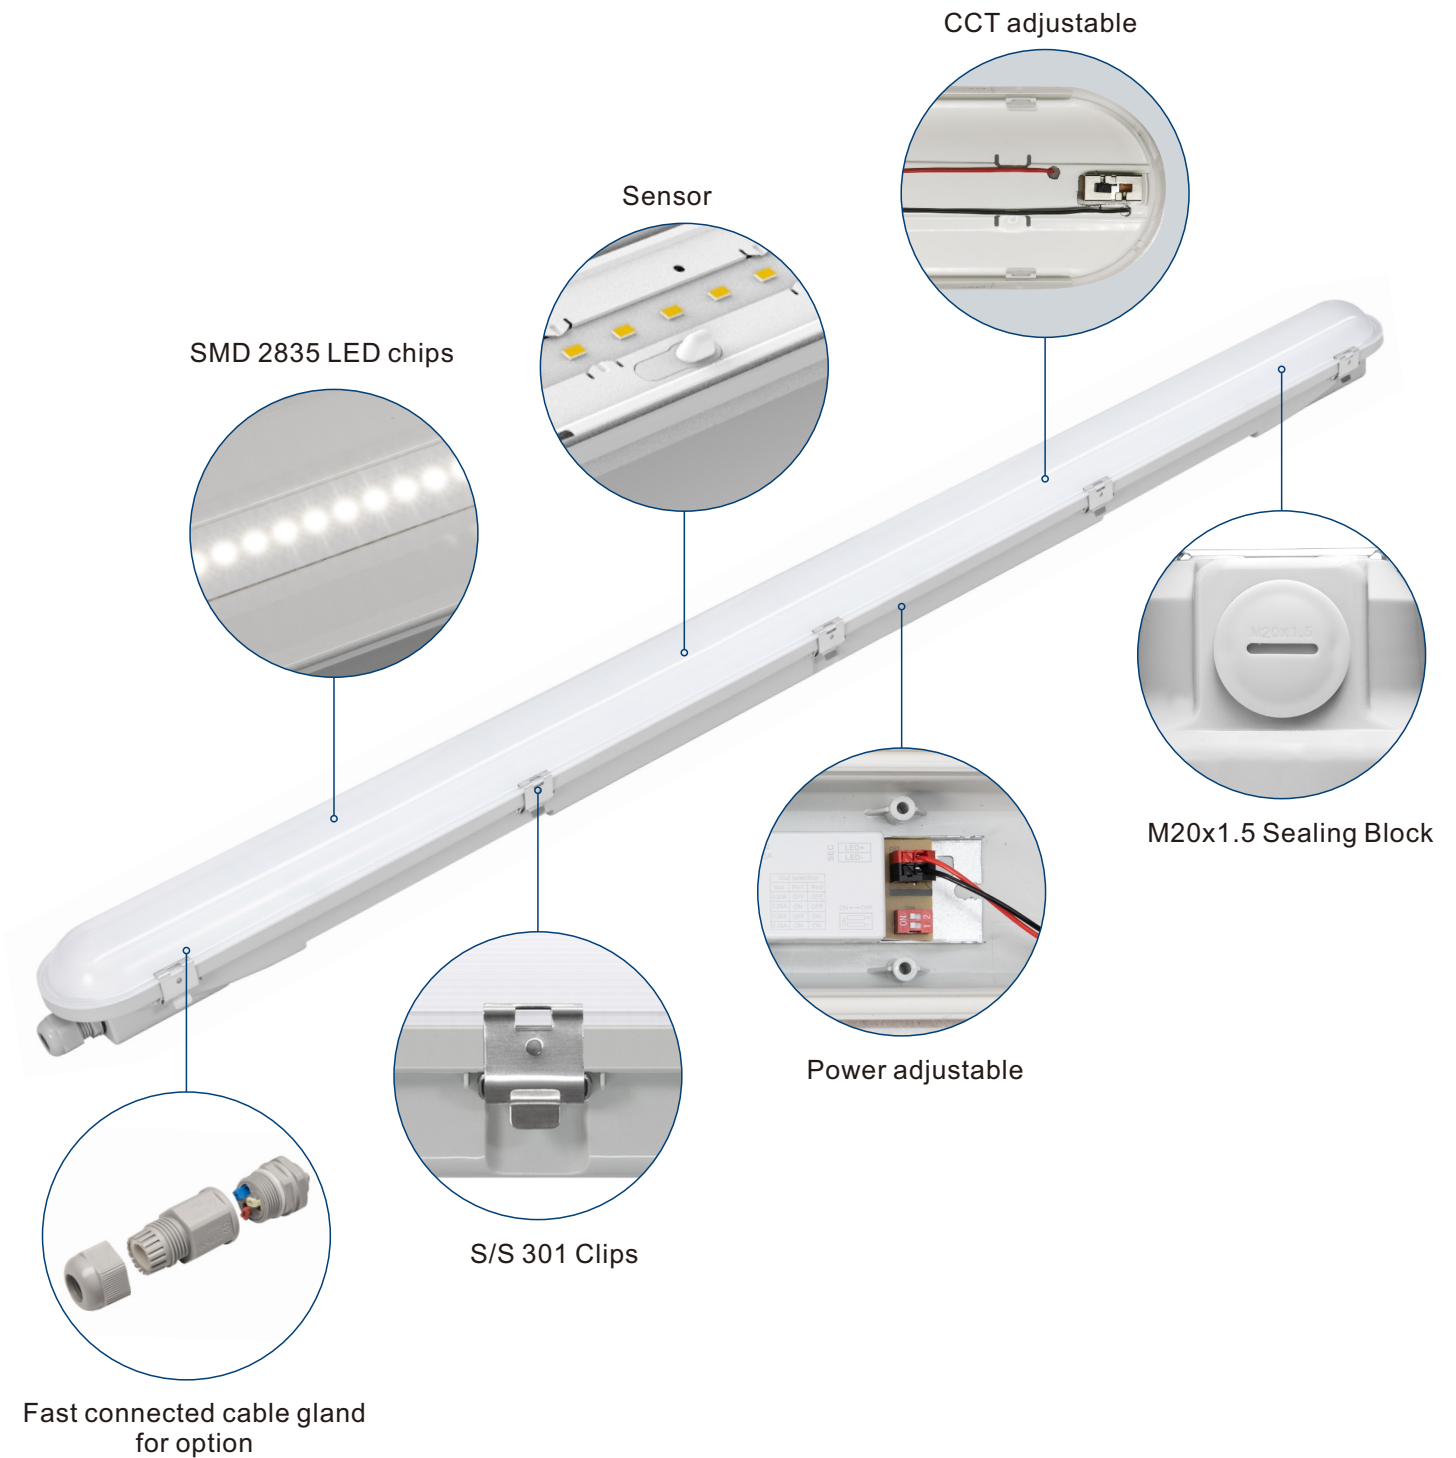

Product Photo

2FT 640*79*68mm



4FT 1205*79*68mm



5FT 1505*79*68mm



Product Photo

